


# VNS-10WR2

10.1" ultra slim Panel PC

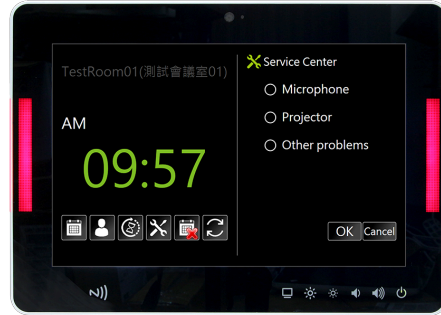

## Product Features

- RockChip RK3568
- 64GB eMMC
- 4GB LPDDR4
- PCAP

## Specification

### System Information

**Processor** Rockchip RK3568

**System Memory** 4GB LPDDR4

### Storage

**Storage** 64GB eMMC

### Display

**Spec. & Resolution** LVDS: Max. resolution 1280x800 @ 60Hz

### Audio

**Speaker Output** 4Ω 2.0W/2.2W(MAX)

### Power Requirement

**DC Input** 12~24V

### Software Support

**OS** Android 11, Debain 11

## Certification

**Certification Information** CE/FCC Class B

## Panel

<b>LCD Size</b>	10.1"
<b>Display Type</b>	WXGA
<b>Resolution</b>	1280 x 800
<b>Luminance</b>	350 cd/m2
<b>Viewing angle</b>	85 (U), 85 (D), 85 (L), 85 ( R)
<b>Response time</b>	30 ms
<b>Touch Type</b>	PCAP
<b>Touch Light Transmission</b>	>86%

## External I/O

<b>USB Port</b>	2 x USB 3.0 Type A
<b>Wireless LAN</b>	1 x RJ45
<b>COM Port</b>	1 x RS232/485 (RJ45 Type)
<b>Other</b>	1 x Touch key

## Data Communication

**WLAN** Wi-Fi 802.11ac/a/b/g/n

## Mechanical

<b>Power Type</b>	AT
<b>Color</b>	White Plastic w/ Antibacterial

## Mechanical & Environmental

<b>Operating Temp.</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Storage Temp.</b>	-10°C ~ 60°C (-14°F ~ 140°F)
<b>Operating Humidity</b>	40°C @ 95% Relative Humidity, non-condensing
<b>Dimension (W x L x H)</b>	270 x 193 x 28 mm
<b>Weight</b>	1.1 kg
<b>VESA</b>	75 x 75

**Power Requirement**

DC 12~24V

---

**Power Mode**

DC jack or Powered LAN 802.3at

## Component

**Adapter**

Optional

Input: 100 ~ 240Vac/ 50 ~ 60Hz

Output: 60W adapter (12V @ 5A adapter) AC-DC adapter

## Ordering Information

**Ordering Information**

VNS-10WR2-CW49-1R:VNS-10WR2-4G/64G-Andriod 11

---